




FRONT DISCHARGE ARP CONDENSING



Model ARP

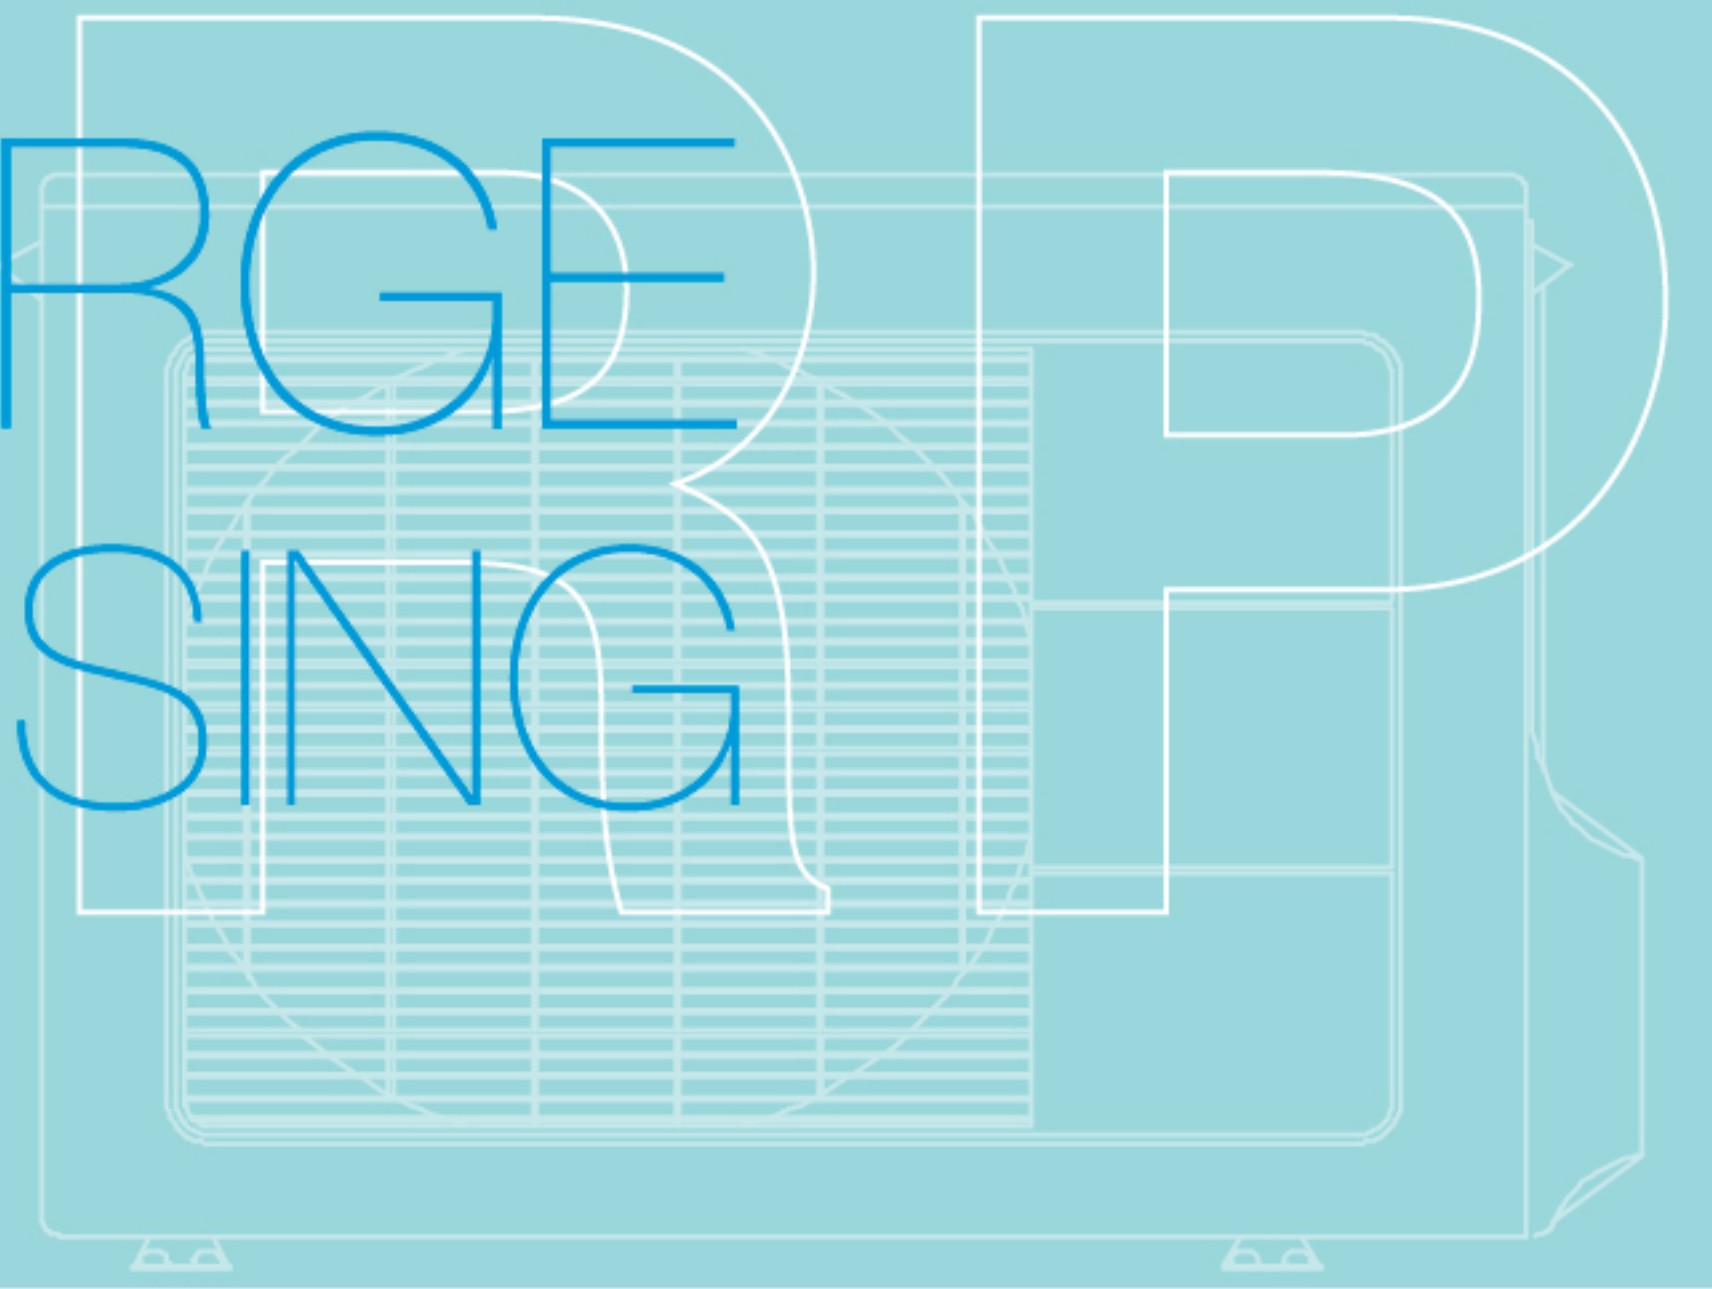

Outdoor unit

- Standard Condition**
- Elegant! silent! reliable!
 - Quiet performance
 - Easily configuration
 - Easy Installation & Service
 - Low noise and energy consumption
 - Durable, attractive cabinet
 - Rear intake and front outlet
 - LOW
 - Low energy consumption
 - Suitable for seaside
 - CORROSIVE
 - Corrosive protection
 - Copper tube aluminum fin coil
 - R-22
 - Save Energy

- Options**
- Heat pump
 - 50°C
 - High ambient temperature
 - Coated fin
 - Control 24 v
 - 24V
 - Single phase 208-230V/1Ph/60Hz
 - 1 PHASE
 - Three phase 208-230V/3Ph/60Hz
 - 3PHASE
 - HI-LO Pressure protection
 - R407C
 - R410A

CONDENSING UNITS GENERAL DATA "ARP"

Model Number		10	12	16	18	20	25	30	
Performance Data	Nominal cooling capacity	Btu/h	10000	12000	16000	18000	20000	25000	30000
	Noise level	dB(A)	52-56		54-60				
Power Supply	Voltage	V / Ph / Hz	220/1/50,230/1/60						
Compressor Data	Type		Rotary						
Fan	Type		Propeller						
	No. of fans	n	1						
Fan Motor	Type		6 P						
	Voltage	V / Ph / Hz	220/1/50						
	Speed	RPM	850						
Coil Data	Coil Face Area	m ²	0.4		0.53				
	Number of rows	n	1	1.4	1.6		2		
Refrigerant System	Gas	Type	R 22 / R407c						
	Liquid line size	in	1/4		3/8				
	Suction line size	in	1/2		5/8				
Dimensions	Height (Box / Unit)	mm	585/570		670/655				
	Width (Box/Unit)	mm	825/812		933/920				
	Length (Box/Unit)	mm	310/288		350/330				
Weight Approx.	Net / Gross approx.	kg	32	35	48	52	54	56	60
Shipping Info	20' container load	n	204		114				
	40' container load	n	416		237				
	40' HC container load	n	416		237				

Specification are subject to change without notice Note : @ Rating Btu/Hr 80°F (26.7°C) D.B., 67°F (19.4°C) W.B. entering air to INDOOR coil 95°F (35°C) ambient air for OUTDOOR unit