



PACKAGE DUCTED TYPE RAW

New


Model RAW



Standard Condition



Options

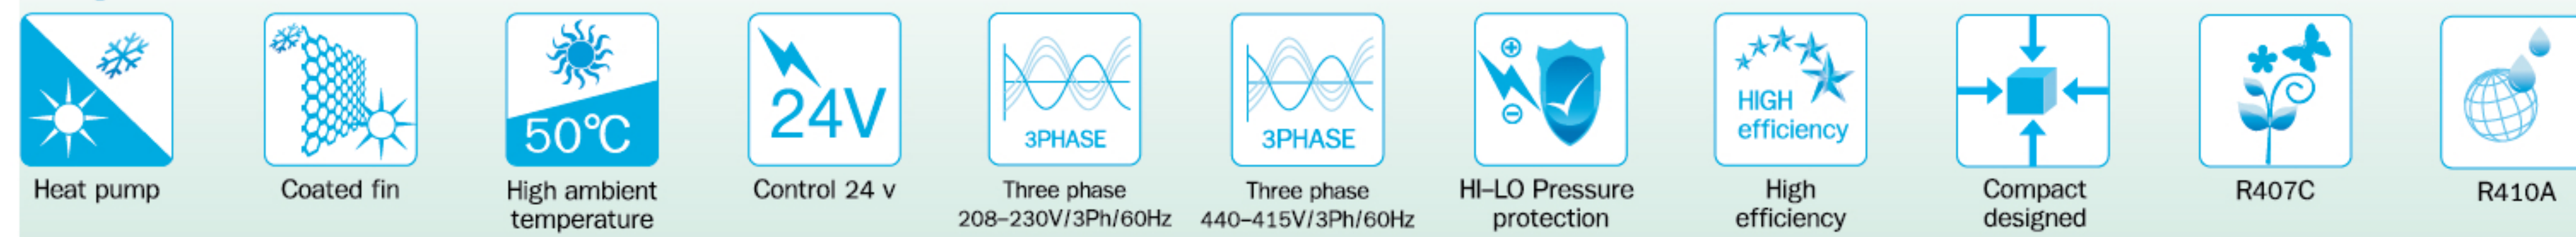

SPECIFICATION DATA "RAW"

Model Number			060	080	110	120	180	230	280	340	450	540
Nominal Cooling Capacity	Btu/h		60600	80000	110000	120000	185000	245000	289000	344300	450600	546600
	KW		17.8	23.4	32.2	35.2	54.2	71.8	84.7	100.9	132.1	160.2
Power Supply	V / Ph / Hz		380/3/50									
Refrigerant	Type		R-22									
	Type		Scroll					Semi-Hemetic				
Compressor	Qty		1									
	Unloading Cylinder	No.	1									
	Capacity Steps	No.	1					2				
Condensor	Type		Shell and Tube									
	Qty		1									
Evaporator Fan	Type		Direct Driven	Belt Driven Centrifugal								
	CFM		2000	2400	3400	3800	5800	6400	7700	9500	12800	15000
Fan Motor	HP		1100	1100	970	835	690	700	710	710	871	590
	RPM		1	1 1/2	2		4		5.5	7.5	10	15
	Type		3/8 Copper Tube Aluminum Fins									
Evaporator	Number of Row-Fin/in		3-15		3-13	3-15			4-15		3-15	
	ft2		5	6.25		7.916	11.875	15.75		19.16	24.95	40.9
Return Air Filter	Type		Aluminum									
	Cut-Out	PSI	299									
High Static Pressure Setting	Cut-In	PSI	228									
	Cut-Out	PSI	28									
Low Static Pressure Setting	Cut-In	PSI	57									
	Connection Pipe	Water Inlet	Qty/In	1-2			1-2 1/2			1-3		
Water Outlet		Qty/In	1-2			1-2 1/2			1-3			

Specification are subject to change without notice Note : @ Rating Btu/Hr 80°F (26.7°C) D.B., 67°F (19.4°C) W.B. entering air to INDOOR coil 95°F (35°C) ambient air for OUTDOOR unit